


H.D.S. panel for H.D.S. fiber optic and copper modules

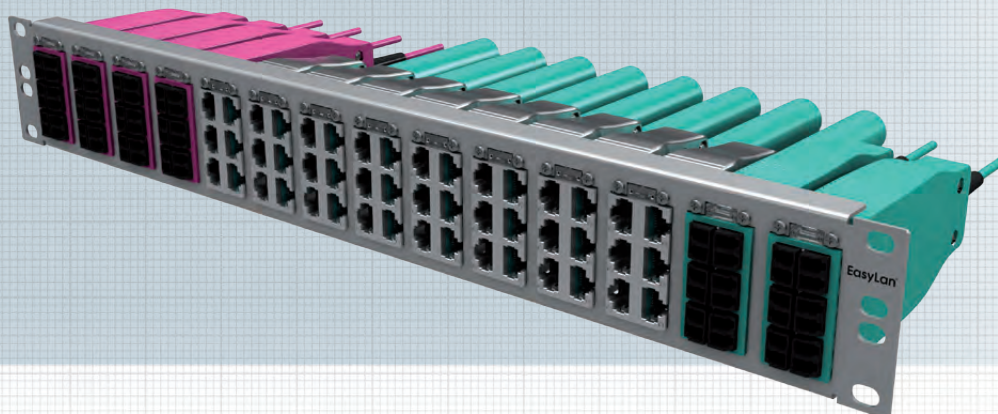

H.D.S. panel used to affix H.D.S. fiber optic and H.D.S. copper modules in distributor cabinet.

H.D.S. panels available in 1U, 1.5U, 2U and 3U versions. Installation material and grounding wire not included in package.

Standards:



IEC 60603-7

Properties:

Installation	19" 1U – 3U, depth 35mm
Front side	breakout for up to 28 H.D.S. modules
Material housing	steel plate, varnished RAL 7035
Materials	acc. to RoHS 2002/95/EC

Environmental requirements:

Connection class	IP20
Temperature	-40°C – +70°C

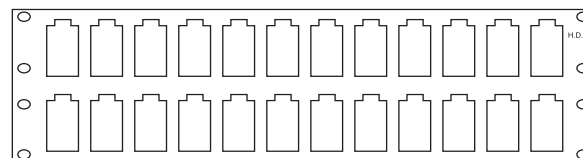

Description	Part number
Front plate 6-fold H.D.S. (diagonal) 1.0U RAL 7035	AHVPL0610
Front plate 12-fold H.D.S. (vertical) 1.5U RAL 7035	AHVPL1215
Front plate 14-fold H.D.S. (vertical) 1.5U RAL 7035	AHVPL1415
Front plate 14-fold H.D.S. (vertical) 2.0U RAL 7035	AHVPL1420
Front plate 24-fold H.D.S. (vertical) 3.0U RAL 7035	AHVPL2430
Front plate 28-fold H.D.S. (vertical) 3.0U RAL 7035	AHVPL2830
Dummy plate for H.D.S. fanout	AHVZMB001