


LSH Duplex Patch and Adapter Cables

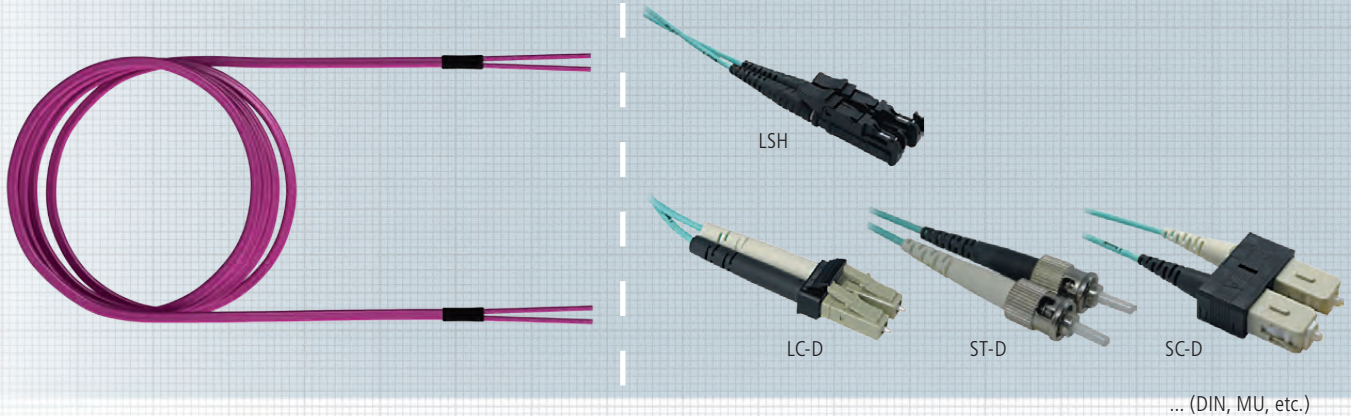

FO patch cables as connection or adapter cables.
The standard version of the connection cable is crossover.
For the SC / LC duplex, subsequent mutual rotation of the connectors is possible.

The FO patch cable has been developed especially for use in offices, industry and data centers.
High-quality processing ensures that the optical transmission parameters offer a maximum of data security.

The FO patch cable can be ordered together with all standard FO connectors.

- PushPull Connectors
- Integrated protective cap protects end surfaces against dirt and mechanical impairment and prevents emission of laser light when unplugged.
- One-piece design
- Color-codable connectors and adapters
- Mechanical codable connectors
- Suitable for high-power applications

Specification:

Norms	IEC 61 754-15, TIA 604-16
Technology	Ceramic ferrule (2.5 mm)
Tuning	in 60° increments
Strain relief	100 N
Operating temperature	-10 °C ... +70 °C
Material	flame-retardant acc. to UL 94 V-0
Service life	minimum 1000 mating cycles
Housing colors	per connector norm
Sheath	FRNC: IEC 60 332-1; IEC 50 754-2; IEC 61 034
Cable color	heather violet RAL 4003 (Multimode OM4) aqua RAL 6027 (Multimode OM3) yellow RAL 1021 (Singlemode OS2)
Build	I-V(ZN)HH
Packaging unit	individually packaged