


preLink® / fixLink® SM/FM Housing Set, Lockable, IP44, Double

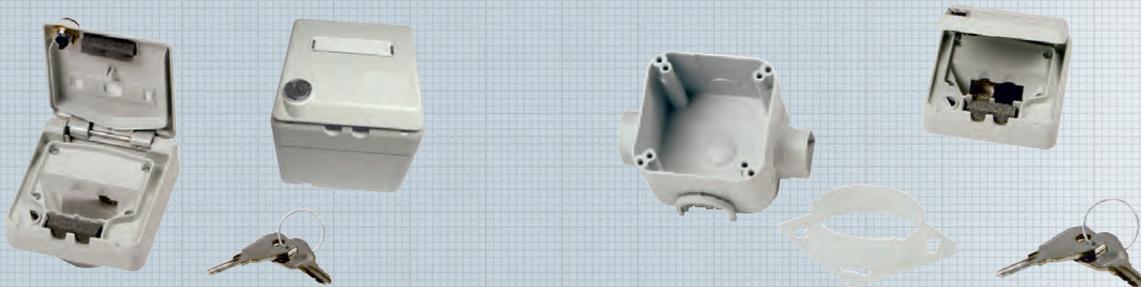

preLink® / fixLink® Surface-Mount Housing Set Double, Lockable IP44

Surface-mount housing is suitable for installation of preLink® and fixLink® Keystone modules via an adapter. For better strain relief we recommend using cable clamp M25 / 2x8, which is designed to handle two cables with a diameter of up to 8 mm.

Properties:

Material	Polymer
Color	light gray, similar to RAL 7035
Dimensions (HxWxD)	90 x 90 x 90 mm
Connection class	degree of protection IP44
Packaging unit	1 piece per box

preLink® / fixLink® Flush-Mount Housing Set Double, Lockable IP44

Flush-mount housing is suitable for installation of preLink® and fixLink® Keystone modules via an adapter. The kit contains the flush-mount housing as well as the IP44 flush-mount outlet.

Properties:

Material	Polymer
Color	light gray, similar to RAL 7035
Dimensions (HxWxD)	35 x 90 x 90 mm
Connection class	degree of protection IP44
Packaging unit	1 piece per box

Description	Ordering Code
preLink® / fixLink® Surface-Mount Housing Set Double, Lockable IP44	CKVDAP42
Cable clamp	CKVDZP40
preLink® / fixLink® Flush-Mount Housing Set, Double, Lockable IP44	CKVDUP42